


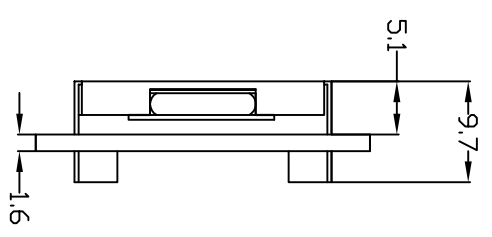


Customer approval : _____

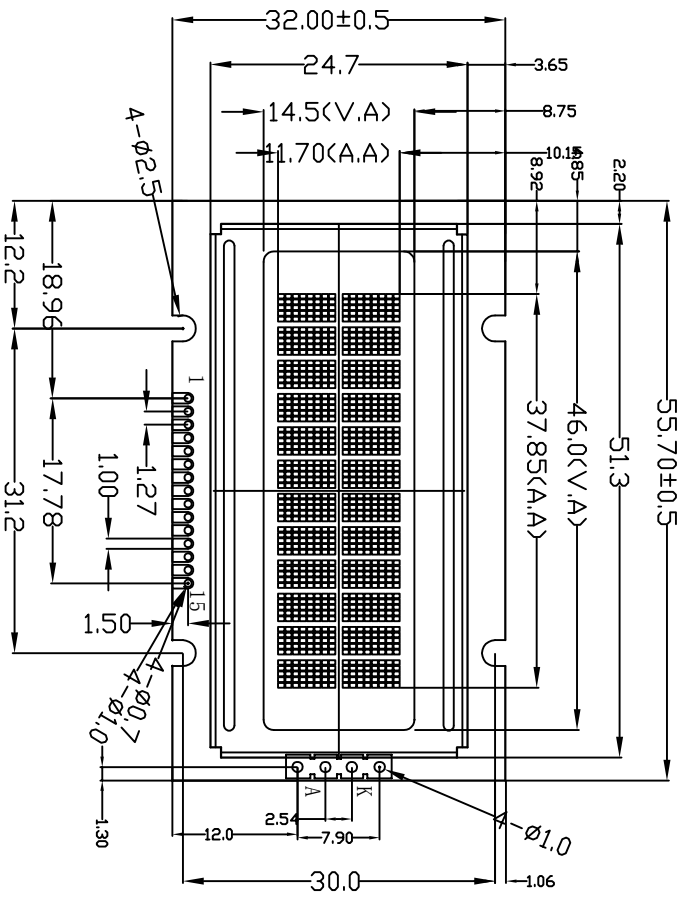

Specification:

- 1). Driving: Duty:1/16, Bias:1/4, VLCD:4.0V(Ref), VDD: 5V
- 2). Viewing Direction: 6 O'clock
- 3). Display mode:STN/Y-G/POSITIVE
- 4). Operating temp.: -20°C~+70°C
Storage temp.: -30°C~+80°C
- 5). Controller IC: SPLC780
- 6). Backlight: Bottom, YG
- 7). Dimensions with mark "*" are important, with mark "(") are referenced
- 8). All the raw materials are RoHS compliant

PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
CONNECTION	VSS	VDD	VO	RS	RW	E	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7	BLA

REV	REVISION RECORD	DATE	MODEL NO.			APPROVED BY			GENERAL TOL: ± 0.3		
AO	First issue	11/14	SYB1202AV10-5C10VL3N2-B5MG			DRAWING BY			PAGE?		
			SYB1202AV10-5C10VL3N2-B5MG			CHECKED BY			PROJECTION		
			SYB1202AV10-5C10VL3N2-B5MG			DRAWING BY			UNIT: mm		

TCC 深圳市三元鼎科技有限公司
ShenZhen TCC LCD Hi-Tech Co., Ltd

