


Customer approval :

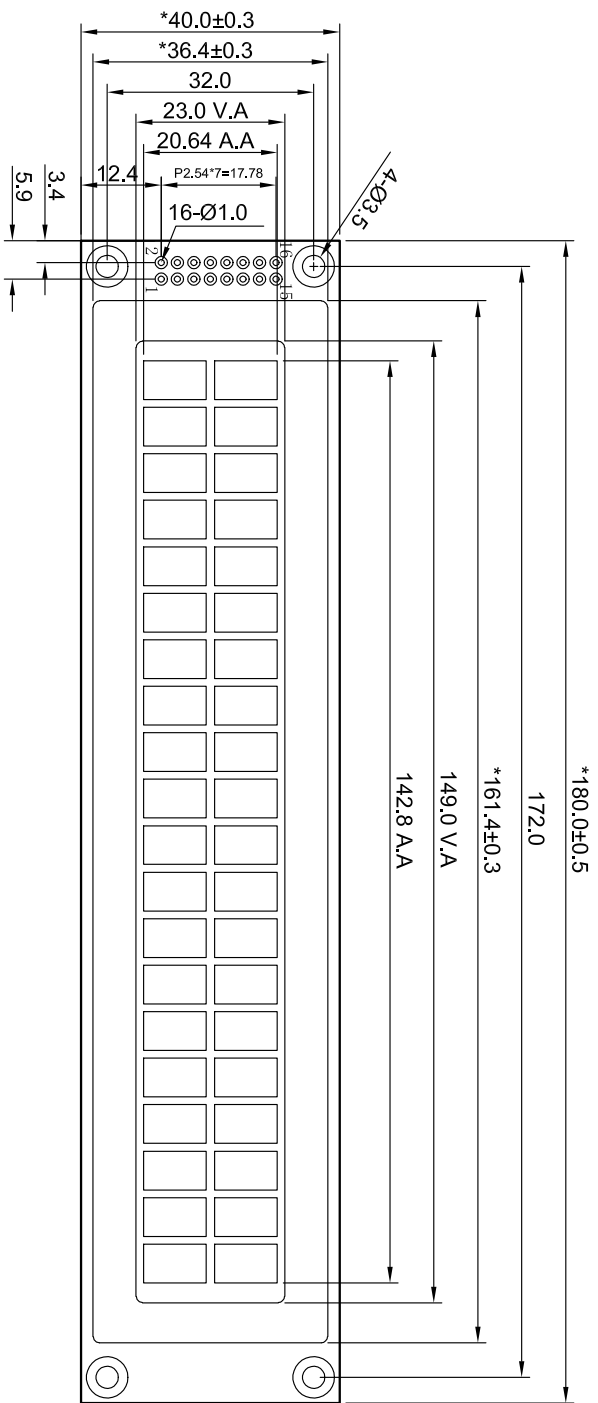

- SPECIFICATION:**
- 1). Driving: Duty:1/16, Bias:1/5, Vdd:5.0V, Vlcd:4.6V
 - 2). VIEWING DIRECTION: 6 O'CLOCK
 - 3). Display mode: STN/Positive/ Transflective/YG
 - 4). Operating temp.:0°C~+50°C
 - 5). Storage temp.: -10°C~+60°C
 - 6). Control IC: SPLC780D1 (Or Compatible)
 - 7). BACKLIGHT: Array, YG
 - 8). DIMENSIONS WITH MARK "*" ARE IMPORTANT WITH MARK "(") ARE REFERENCED
 - 9). All the raw materials are RoHS compliant

*

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
BLA	BLK	VDD	VSS	RS	Vo	E	RAW	DB1	DB0	DB3	DB2	DB5	DB4	DB7	DB6

REVISION RECORD		REV
First issue		A0

DRAWING NO.	SYB2002BV20-5C10YL1-B5NG	GENERAL TOL.	± 0.2
APPROVED BY	Liu	CHECKED BY	Francis
DRAWING BY	YJQ	DATE	2010/9/24

深圳市三元晶科技有限公司
 ShenZhen TCC LCD Hi-Tech Co., Ltd

UNIT:	mm	PAGE	1/1
-------	----	------	-----