



Customer approval :

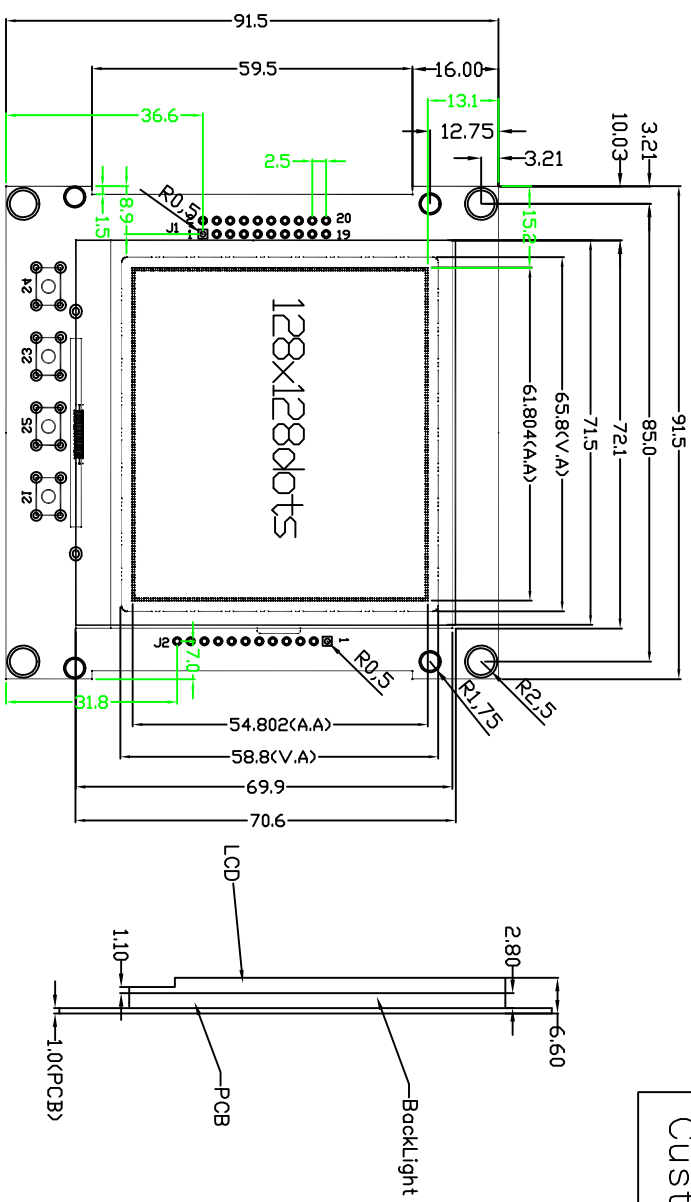

J1

PIN	1	2	3	4	5	6	7	8	9	10
CONNECTION	GND	VCC	RES	CS	CD	WRO	WR1	DB0	DB1	DB2
PIN	11	12	13	14	15	16	17	18	19	20
CONNECTION	DB3	DB4	DB5	DB6	DB7	K1	K2	K3	K4	BLK

J2

PIN	1	2	3	4	5	6	7	8	9	10	11	12
CONNECTION	GND	VCC	RES	CS	SCLK	SDK	CD	K1	K2	K3	K4	BLK

- Specification:
- 1). Driving: Duty: VLCD:13V, VCC:5.0V
  - 2). Viewing angle: 6 O'clock
  - 3). Display mode: STN/Negative/Transmissive/Blue
  - 4). Operating temp.: -20°C~+70°C
  - 5). Storage temp.: -30°C~+80°C
  - 6). Control IC: UC1617S
  - 6). Backlight: Edge White
  - 7). Dimensions with mark "()" are referenced
  - 8). All the raw materials are RoHS compliant

REV	REVISION RECORD	DATE	MODEL NO.				GENERAL TOL: ± 0.2			
A0	First issue	13/05	SYG128128CV10-5C35BLR-B3NC				PAGE? 1 OF 1			
			APPROVED BY				UNIT: mm			
			CHECKED BY				PROJECTION			
			DRAWING BY							


**深圳市三元晶科技有限公司**  
 ShenZhen TCC LCD Hi-Tech Co., Ltd.