

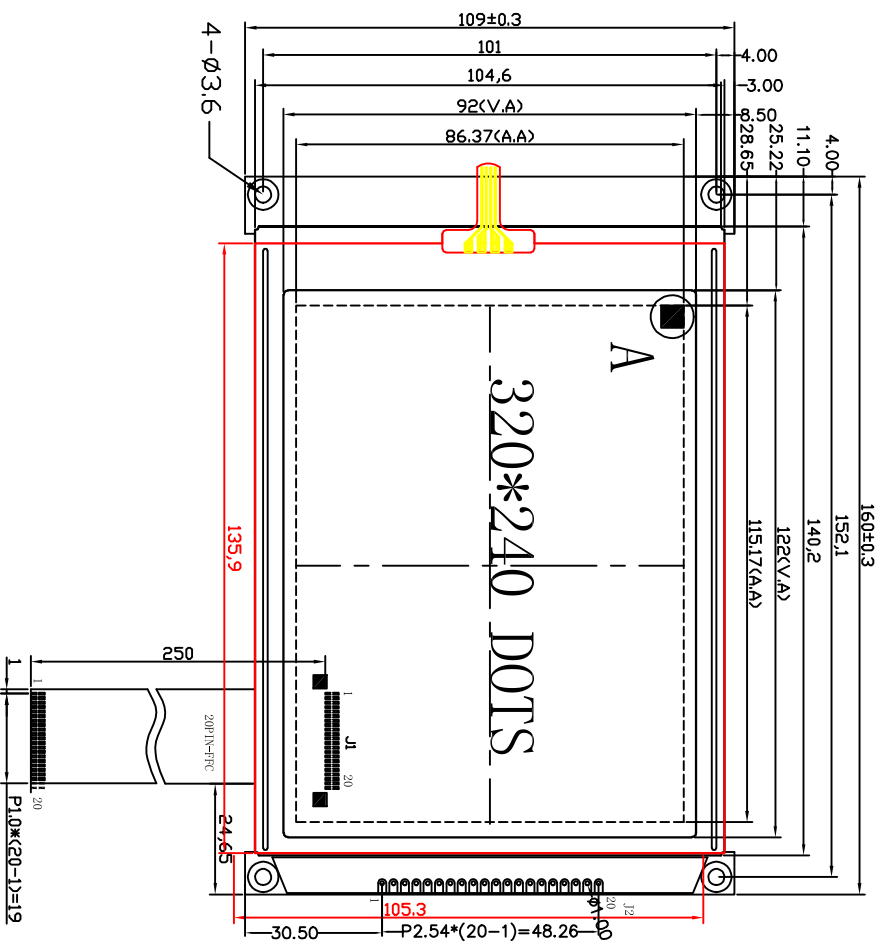



Customer approval :



J2接口在背光底面，建议客户不使用此接口，若客户要使用此接口，请从模块背面焊接排线使用！

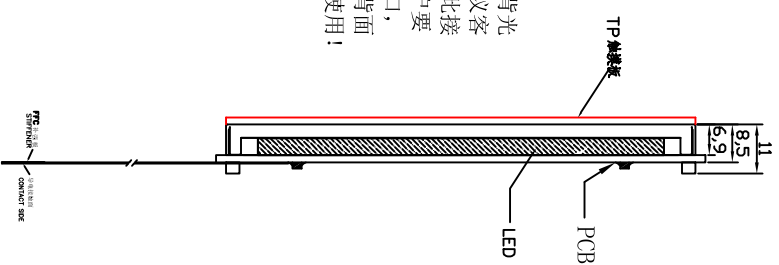

J1/J2:

接口选择使用，FPC选择使用，TP选择使用

PIN	1	2	3	4	5	6	7	8	9	10	11	12
CONNECTION	VSS	VDD	V0	/MR	/RD	/CS	C/D	/RST	DB0	DB1	DB2	DB3
PIN	13	14	15	16	17	18	19	20				
CONNECTION	DB4	DB5	DB6	DB7	YOUT	BLA	INT	BUSY				

- SPECIFICATION:
- 1). Driving: Duty:1/240, Bias:1/17, VOUT:-21.5V, V0:-18.5V, VDD:5V
 - 2). VIEWING DIRECTION: 6 D'CLDCK
 - 3). Display mode: STN/Negative/Transmissive/Blue
 - 3). Operating temp.i: -20°C~+70°C
 - 4). Storage temp.i: -30°C~+80°C
 - 5). Control IC: RA8803
 - 6). BACKLIGHT Type: Edge,White
 - 7). DIMENSIONS WITH MARK "*" ARE IMPORTANT WITH MARK "()" ARE REFERENCED
 - 8). All the raw materials are RoHS compliant

REV	REVISION RECORD	DATE	MODEL NO.				GENERAL TOL: ± 0.3					
A0	First issue	11/8	SYM320240BZK V30-5C7BL N1R8-BSNI				深圳市三元晶科技有限公司 ShenZhen TCC LCD Hi-Tech Co., Ltd.					
			模组型号	APPROVED BY	CHECKED BY	DRAWING BY	页面	OF	UNIT: mm			
							PROJECTION	角				