




Customer approval :

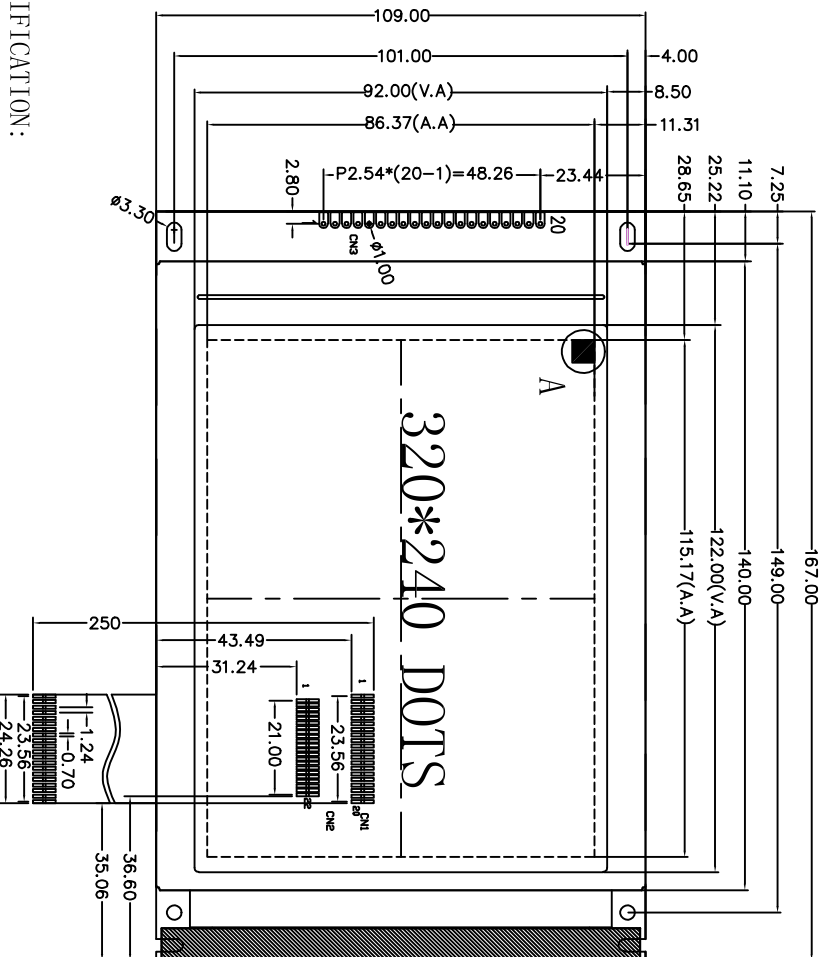

SPECIFICATION:

- 1). Driving: Duty:1/240, Bias:1/17, VOUT:28.90V, V0:21.40V, VDD:5V
- 2). VIEWING DIRECTION: 6 O'CLOCK
- 3). Display mode: STN/Negative/Transmissive/Blue
- 4). Operating temp.: -20° C~+70° C
Storage temp.: -30° C~+80° C
- 5). Control IC: RA8835P3N-NE
- 6). BACKLIGHT Type: White 5V 90ma
- 7). DIMENSIONS WITH MARK "*" ARE IMPORTANT
WITH MARK "()" ARE REFERENCED
- 8). All the raw materials are RoHS compliant

CN1	CN2	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22
/RST	VSS	VCC	V0	AO	/MR	/RD	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7	VCC	/S	/RST	VOUT	SEL1	NC	NC	NC	NC
VSS	VCC	V0	/MR	/CS	AO	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7	VCC	VSS	VOUT	V0	NC	NC	NC	NC	NC	NC
NC3	VSS	VCC	V0	/MR	/RD	/S	AO	/RST	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7	NC	NC	NC	NC	NC	NC	NC

接口选择使用, FPC选择使用

REV	REVISION RECORD	DATE
A0	First issue	05/15



深圳市三元晶科技有限公司
ShenZhen TCC LCD Hi-Tech Co., Ltd.

MODEL NO.	SYT320240B4V20	GENERAL TOL: ± 0.3
APPROVED BY		UNIT: mm
CHECKED BY		PAGE 1 OF 3
DRAWING BY	LAN	PROJECTION
		角